

# RocketStor 6422TS

## Turbo RAID Class 8-bay Rackmount Enclosure



Quick Installation Guide  
V 1.1

# Product Overview

The RocketStor 6422TS includes a 2U-8 Bay enclosure and a HighPoint RocketRAID 2722 HBA (Host Bus Adapter). This pamphlet gives you a brief overview of the components you should find in your package as well as the basic steps for getting set up.

## Kit Contents

<b>Item</b>	<b>Count</b>
Enclosure	1
HighPoint RocketRAID 2722	1
HDD Trays	8
Mini-SAS (SFF-8088) Cables	2
Power Cord	1
NetStor Manual CD-ROM	1
HDD mounting screws	36
Key for HDD Trays	2


## Operating Systems Supported

- Windows / Windows Server
- Linux: RedHat Enterprise, OpenSUSE, Fedora Core, Debian, and Ubuntu
- FreeBSD (9.3 and later)
- Mac OSX 10.6 and later (drivers are embedded in OSX 10.8.3 and later)

# Hardware Installation

## Set up the Enclosure (See NetStor enclosure Quick Installation Guide)

1. Place the Enclosure on a flat surface
2. Place physical drives in each disk tray (up to 8). Slide the locking mechanism to the left, when tab pops out, pull the disk tray out.
3. Place each hard disk in tray as shown below. Then place disk trays back into enclosure.

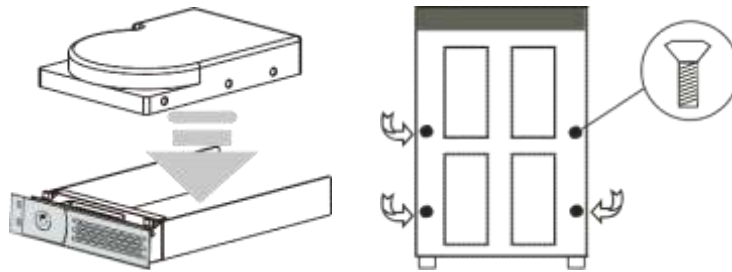

4. Connect the enclosure to both power receptacles.

## Set Up HBA

1. Insert the included RocketRAID 2722 into an available PCIe 2.0 x8 or compatible PCIe slot on your PC/Mac motherboard

Connect the HBA and enclosure together with a mini-SAS to mini-SAS connector (SFF-8088)

